High Speed, Low Power Monolithic Op Amp

AD848/AD849

FEATURES

725 MHz Gain Bandwidth – AD849
175 MHz Gain Bandwidth – AD848
4.8 mA Supply Current
300 V/μs Slew Rate
80 ns Settling Time to 0.1% for a 10 V Step – AD849
Differential Gain: AD848 = 0.07%, AD849 = 0.08%
Differential Phase: AD848 = 0.08°, AD849 = 0.04°
Drives Capacitive Loads

DC PERFORMANCE

3 nV/√Hz Input Voltage Noise – AD849
85 V/mV Open Loop Gain into a 1 kΩ Load – AD849
1 mV max Input Offset Voltage
Performance Specified for ±5 V and ±15 V Operation
Available in Plastic, Hermetic Cerdip and Small Outline Packages. Chips and MIL-STD-883B Parts Available.
Available in Tape and Reel in Accordance with EIA-481A Standard

APPLICATIONS

Cable Drivers
8- and 10-Bit Data Acquisition Systems
Video and R_F Amplification
Signal Generators

CONNECTION DIAGRAMS

Plastic (N), Small Outline (R) and Cerdip (Q) Packages



NC = NO CONNECT

20-Terminal LCC Pinout

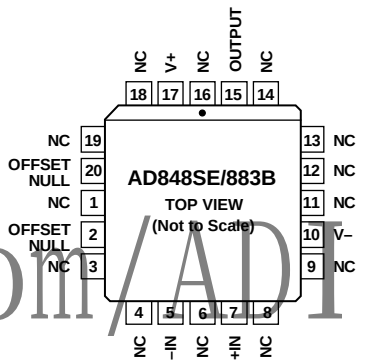

NC = NO CONNECT

www.BDTIC.com/ADI

PRODUCT DESCRIPTION

The AD848 and AD849 are high speed, low power monolithic operational amplifiers. The AD848 is internally compensated so that it is stable for closed loop gains of 5 or greater. The AD849 is fully decompensated and is stable at gains greater than 24. The AD848 and AD849 achieve their combination of fast ac and good dc performance by utilizing Analog Devices' junction isolated complementary bipolar (CB) process. This process enables these op amps to achieve their high speed while only requiring 4.8 mA of current from the power supplies.

The AD848 and AD849 are members of Analog Devices' family of high speed op amps. This family includes, among others, the AD847 which is unity gain stable, with a gain bandwidth of 50 MHz. For more demanding applications, the AD840, AD841 and AD842 offer even greater precision and greater output current drive.

The AD848 and AD849 have good dc performance. When operating with ±5 V supplies, they offer open loop gains of 13 V/mV (AD848 with a 500 Ω load) and low input offset voltage of 1 mV maximum. Common-mode rejection is a minimum of 92 dB. Output voltage swing is ±3 V even into loads as low as 150 Ω.

APPLICATIONS HIGHLIGHTS

1. The high slew rate and fast settling time of the AD848 and AD849 make them ideal for video instrumentation circuitry, low noise pre-amps and line drivers.
2. In order to meet the needs of both video and data acquisition applications, the AD848 and AD849 are optimized and tested for ±5 V and ±15 V power supply operation.
3. Both amplifiers offer full power bandwidth greater than 20 MHz (for 2 V p-p with ±5 V supplies).
4. The AD848 and AD849 remain stable when driving any capacitive load.
5. Laser wafer trimming reduces the input offset voltage to 1 mV maximum on all grades, thus eliminating the need for external offset nulling in many applications.
6. The AD848 is an enhanced replacement for the LM6164 series and can function as a pin-for-pin replacement for many high speed amplifiers such as the HA2520/2/5 and EL2020 in applications where the gain is 5 or greater.

REV. B

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
Tel: 617/329-4700 **Fax: 617/326-8703**

AD848/AD849–SPECIFICATIONS (@ T_A = +25°C, unless otherwise noted)

Model	Conditions	V_S	AD848J Min	AD848J Typ	AD848J Max	AD848A/S Min	AD848A/S Typ	AD848A/S Max	Units
INPUT OFFSET VOLTAGE[1]		±5 V		0.2	**1**		0.2	**1**	mV
		±15 V		0.5	**2.3**		0.5	**2.3**	mV
	T_{MIN} to T_{MAX}	±5 V			1.5			**2**	mV
		±15 V			3.0			**3.5**	mV
Offset Drift		±5 V, ±15 V		7			7		µV/°C
INPUT BIAS CURRENT		±5 V, ±15 V		3.3	**6.6**		3.3	**6.6/5**	µA
	T_{MIN} to T_{MAX}	±5 V, ±15 V			7.2			7.5	µA
INPUT OFFSET CURRENT		±5 V, ±15 V		50	**300**		50	**300**	nA
	T_{MIN} to T_{MAX}	±5 V, ±15 V			400			**400**	nA
Offset Current Drift		±5 V, ±15 V		0.3			0.3		nA/°C
OPEN LOOP GAIN	V_O = ±2.5 V	±5 V							
	R_{LOAD} = 500 Ω		**9**	13		**9**	13		V/mV
	T_{MIN} to T_{MAX}		7			**7/5**			V/mV
	R_{LOAD} = 150 Ω			8			8		V/mV
	V_{OUT} = ±10 V	±15 V							
	R_{LOAD} = 1 kΩ		**12**	20		**12**	20		V/mV
	T_{MIN} to T_{MAX}		8			**8/6**			V/mV
DYNAMIC PERFORMANCE									
Gain Bandwidth	A_{VCL} ≥ 5	±5 V		125			125		MHz
		±15 V		175			175		MHz
Full Power Bandwidth[2]	V_O = 2 V p-p,								
	R_L = 500 Ω	±5 V		24			24		MHz
	V_O = 20 V p-p,								
	R_L = 1 kΩ	±15 V		4.7			4.7		MHz
Slew Rate		±5 V		200			200		V/µs
	R_{LOAD} = 1 kΩ	±15 V	225	300		225	300		V/µs
Settling Time to 0.1%	–2.5 V to +2.5 V	±5 V		65			65		ns
	10 V Step, A_V = –4	±15 V		100			100		ns
Phase Margin	C_{LOAD} = 10 pF	±15 V							
	R_{LOAD} = 1 kΩ			60			60		Degrees
DIFFERENTIAL GAIN	f = 4.4 MHz	±15 V		0.07			0.07		%
DIFFERENTIAL PHASE	f = 4.4 MHz	±15 V		0.08			0.08		Degree
COMMON-MODE REJECTION	V_{CM} = ±2.5 V	±5 V	**92**	105		**92**	105		dB
	V_{CM} = ±12 V	±15 V	**92**	105		**92**	105		dB
	T_{MIN} to T_{MAX}		88			**88**			dB
POWER SUPPLY REJECTION	V_S = ±4.5 V to ±18 V		**85**	98		**85**	98		dB
	T_{MIN} to T_{MAX}		80			**80**			dB
INPUT VOLTAGE NOISE	f = 10 kHz	±15 V		5			5		nV/√Hz
INPUT CURRENT NOISE	f = 10 kHz	±15 V		1.5			1.5		pA/√Hz
INPUT COMMON-MODE VOLTAGE RANGE		±5 V		+4.3			+4.3		V
				–3.4			–3.4		V
		±15 V		+14.3			+14.3		V
				–13.4			–13.4		V
OUTPUT VOLTAGE SWING	R_{LOAD} = 500 Ω	±5 V	**3.0**	3.6		**3.0**	3.6		±V
	R_{LOAD} = 150 Ω	±5 V	**2.5**	3		**2.5**	3		±V
	R_{LOAD} = 50 Ω	±5 V		1.4			1.4		±V
	R_{LOAD} = 1 kΩ	±15 V	**12**			**12**			±V
	R_{LOAD} = 500 Ω	±15 V	**10**			**10**			±V
SHORT CIRCUIT CURRENT		±15 V		32			32		mA
INPUT RESISTANCE				70			70		kΩ
INPUT CAPACITANCE				1.5			1.5		pF
OUTPUT RESISTANCE	Open Loop			15			15		Ω
POWER SUPPLY									
Operating Range			**±4.5**		**±18**	**±4.5**		**±18**	V
Quiescent Current		±5 V		4.8	**6.0**		4.8	**6.0**	mA
	T_{MIN} to T_{MAX}				7.4			**7.4/8.3**	mA
		±15 V		5.1	**6.8**		5.1	**6.8**	mA
	T_{MIN} to T_{MAX}				8.0			**8.0/9.0**	mA

NOTES

[1]Input offset voltage specifications are guaranteed after 5 minutes at T_A = +25°C.

[2]Full power bandwidth = slew rate/2 π V_{PEAK}. Refer to Figure 1.

All min and max specifications are guaranteed. Specifications in **boldface** are tested on all production units at final electrical test. All others are guaranteed but not necessarily tested. Specifications subject to change without notice.

www.BDTIC.com/ADI

Model	Conditions	V_S	AD849J Min	AD849J Typ	AD849J Max	AD849A/S Min	AD849A/S Typ	AD849A/S Max	Units
INPUT OFFSET VOLTAGE[1]		±5 V		0.3	**1**		0.1	**0.75**	mV
		±15 V		0.3	**1**		0.1	**0.75**	mV
	T_{MIN} to T_{MAX}	±5 V			1.3			**1.0**	mV
		±15 V			1.3			**1.0**	mV
Offset Drift		±5 V, ±15 V		2			2		µV/°C
INPUT BIAS CURRENT		±5 V, ±15 V		3.3	**6.6**		3.3	**6.6/5**	µA
	T_{MIN} to T_{MAX}	±5 V, ±15 V			7.2			7.5	µA
INPUT OFFSET CURRENT		±5 V, ±15 V		50	**300**		50	**300**	nA
	T_{MIN} to T_{MAX}	±5 V, ±15 V			400			**400**	nA
Offset Current Drift		±5 V, ±15 V		0.3			0.3		nA/°C
OPEN LOOP GAIN	V_O = ±2.5 V	±5 V							
	R_{LOAD} = 500 Ω		**30**	50		**30**	50		V/mV
	T_{MIN} to T_{MAX}		20			**20/15**			V/mV
	R_{LOAD} = 150 Ω			32			32		V/mV
	V_{OUT} = ±10 V	±15 V							
	R_{LOAD} = 1 kΩ		**45**	85		**45**	85		V/mV
	T_{MIN} to T_{MAX}		30			**30/25**			V/mV
DYNAMIC PERFORMANCE									
Gain Bandwidth	A_{VCL} ≥ 25	±5 V		520			520		MHz
		±15 V		725			725		MHz
Full Power Bandwidth[2]	V_O = 2 V p-p,								
	R_L = 500 Ω	±5 V		20			20		MHz
	V_O = 20 V p-p,								
	R_L = 1 kΩ	±15 V		4.7			4.7		MHz
Slew Rate		±5 V		200			200		V/µs
	R_{LOAD} = 1 kΩ	±15 V	225	300		225	300		V/µs
Settling Time to 0.1%	–2.5 V to +2.5 V	±5 V		65			65		ns
	10 V Step, A_V = –24	±15 V		80			80		ns
Phase Margin	C_{LOAD} = 10 pF	±15 V							
	R_{LOAD} = 1 kΩ			60			60		Degrees
DIFFERENTIAL GAIN	f = 4.4 MHz	±15 V		0.08			0.08		%
DIFFERENTIAL PHASE	f = 4.4 MHz	±15 V		0.04			0.04		Degrees
COMMON-MODE REJECTION	V_{CM} = ±2.5 V	±5 V	**100**	115		**100**	115		dB
	V_{CM} = ±12 V	±15 V	**100**	115		**100**	115		dB
	T_{MIN} to T_{MAX}		96			**96**			dB
POWER SUPPLY REJECTION	V_S = ±4.5 V to ±18 V		**98**	120		**98**	120		dB
	T_{MIN} to T_{MAX}		94			**94**			dB
INPUT VOLTAGE NOISE	f = 10 kHz	±15 V		3			3		nV/√Hz
INPUT CURRENT NOISE	f = 10 kHz	±15 V		1.5			1.5		pA/√Hz
INPUT COMMON-MODE VOLTAGE RANGE		±5 V		+4.3			+4.3		V
				–3.4			–3.4		V
		±15 V		+14.3			+14.3		V
				–13.4			–13.4		V
OUTPUT VOLTAGE SWING	R_{LOAD} = 500 Ω	±5 V	**3.0**	3.6		**3.0**	3.6		±V
	R_{LOAD} = 150 Ω	±5 V	**2.5**	3		**2.5**	3		±V
	R_{LOAD} = 50 Ω	±5 V		1.4			1.4		±V
	R_{LOAD} = 1 kΩ	±15 V	**12**			**12**			±V
	R_{LOAD} = 500 Ω	±15 V	**10**			**10**			±V
SHORT CIRCUIT CURRENT		±15 V		32			32		mA
INPUT RESISTANCE				25			25		kΩ
INPUT CAPACITANCE				1.5			1.5		pF
OUTPUT RESISTANCE	Open Loop			15			15		Ω
POWER SUPPLY									
Operating Range			**±4.5**		**±18**	**±4.5**		**±18**	V
Quiescent Current		±5 V		4.8	**6.0**		4.8	**6.0**	mA
	T_{MIN} to T_{MAX}				7.4			**7.4/8.3**	mA
		±15 V		5.1	**6.8**		5.1	**6.8**	mA
	T_{MIN} to T_{MAX}				8.0			**8.0/9.0**	mA

NOTES

[1]Input offset voltage specifications are guaranteed after 5 minutes at T_A = +25°C.

[2]Full power bandwidth = slew rate/2 π V_{PEAK}. Refer to Figure 1.

All min and max specifications are guaranteed. Specifications in **boldface** are tested on all production units at final electrical test. All others are guaranteed but not necessarily tested. Specifications subject to change without notice.

www.BDTIC.com/ADI

ABSOLUTE MAXIMUM RATINGS[1]

Supply Voltage ..... ±18 V
Internal Power Dissipation[2]
  Plastic (N) ..... 1.1 Watts
  Small Outline (R) ..... 0.9 Watts
  Cerdip (Q) ..... 1.1 Watts
  LCC (E) ..... 0.8 Watts
Input Voltage ..... $\pm V_S$
Differential Input Voltage ..... ±6 V
Storage Temperature Range (Q) ..... –65°C to +150°C
  (N, R) ..... –65°C to +125°C
Junction Temperature ..... +175°C
Lead Temperature Range (Soldering 60 sec) ..... +300°C

NOTES
[1]Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only, and functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.
[2]LCC: θ_{JA} = 150°C/Watt
Mini-DIP Package: θ_{JA} = 110°C/Watt
Cerdip Package: θ_{JA} = 110°C/Watt
Small Outline Package: θ_{JA} = 155°C/Watt.

METALIZATION PHOTOGRAPH

Contact factory for latest dimensions. (AD848 and AD849 are identical except for the part number in the upper right.)
Dimensions shown in inches and (mm).

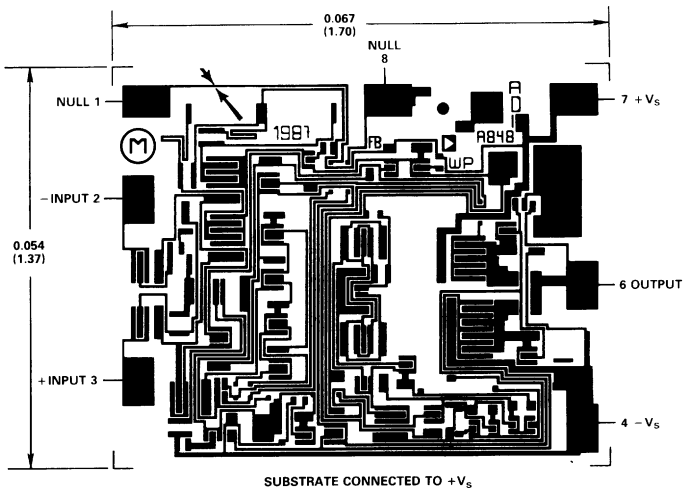

www.BDTIC.com/ADI

ORDERING GUIDE

Model	Gain Bandwidth MHz	Min Stable Gain	Max Offset Voltage mV	Temperature Range – °C	Package Option[1]
AD848JN	175	5	1	0 to +70	N-8
AD848JR[2]	175	5	1	0 to +70	R-8
AD848JCHIPS	175	5	1	0 to +70	Die Form
AD848AQ	175	5	1	–40 to +85	Q-8
AD848SQ	175	5	1	–55 to +125	Q-8
AD848SQ/883B	175	5	1	–55 to +125	Q-8
AD848SE/883B	175	5	1	–55 to +125	E-20A
AD849JN	725	25	1	0 to +70	N-8
AD849JR[2]	725	25	1	0 to +70	R-8
AD849AQ	725	25	0.75	–40 to +85	Q-8
AD849SQ	725	25	0.75	–55 to +125	Q-8
AD849SQ/883B	725	25	0.75	–55 to +125	Q-8
AD847J/A/S	50	1	1	See AD847 Data Sheet	

NOTES
[1]E = LCC; N = Plastic DIP; Q = Cerdip; R = Small Outline IC (SOIC).
[2]Plastic SOIC (R) available in tape and reel. AD848 available in S grade chips. AD849 available in J and S grade chips.

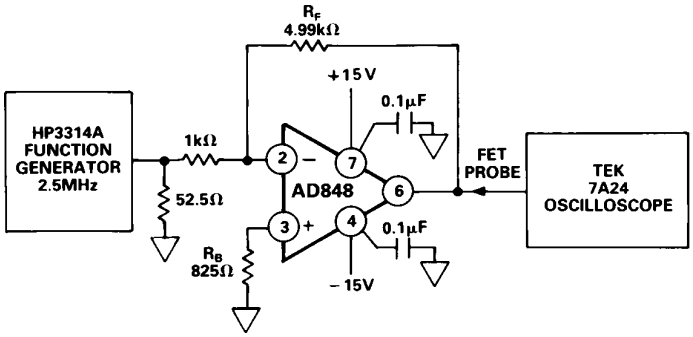

Figure 1. AD848 Inverting Amplifier Configuration

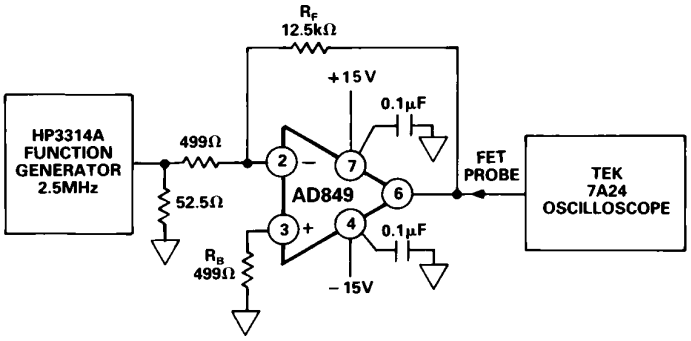

Figure 2. AD849 Inverting Amplifier Configuration

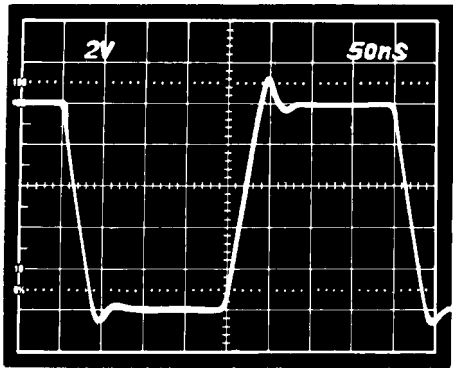

Figure 1a. AD848 Large Signal Pulse Response

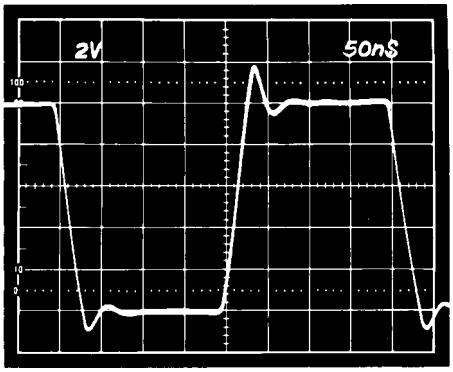

Figure 2a. AD849 Large Signal Pulse Response

WWW.DZTIC.COM/ADI

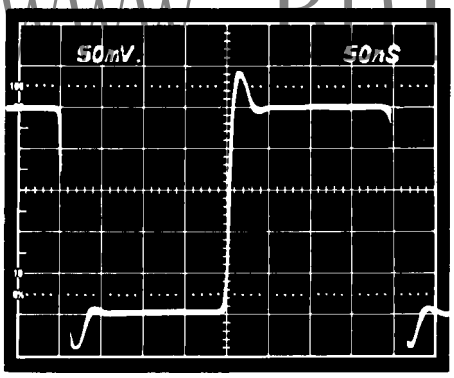

Figure 1b. AD848 Small Signal Pulse Response

Figure 2b. AD849 Small Signal Pulse Response

OFFSET NULLING

The input voltage of the AD848 and AD849 are very low for high speed op amps, but if additional nulling is required, the circuit shown in Figure 3 can be used.

For high performance circuits it is recommended that a resistor (R_B in Figures 1 and 2) be used to reduce bias current errors by matching the impedance at each input. The offset voltage error caused by the input currents is decreased by more than an order of magnitude.

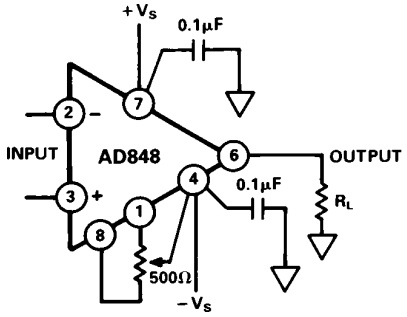

Figure 3. Offset Nulling

AD848/AD849–Typical Characteristics (@ T_A = +25°C and V_S = ±15 V, unless otherwise noted)

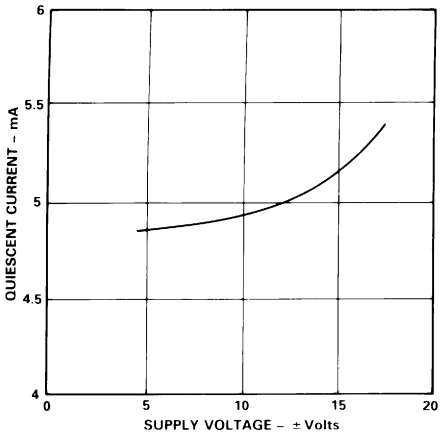

Figure 4. Quiescent Current vs. Supply Voltage (AD848 and AD849)

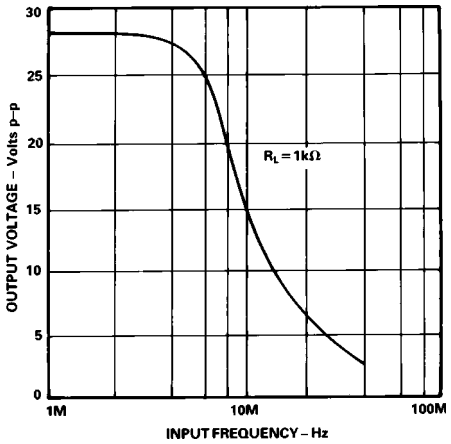

Figure 5. Large Signal Frequency Response (AD848 and AD849)

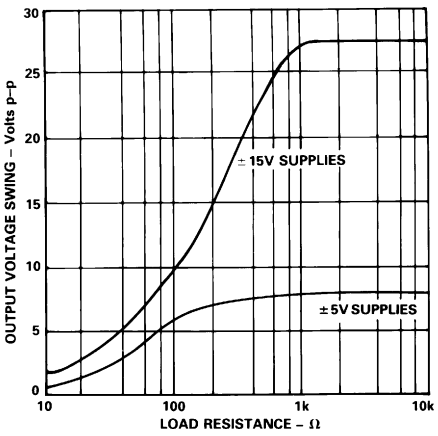

Figure 6. Output Voltage Swing vs. Load Resistance (AD848 and AD849)

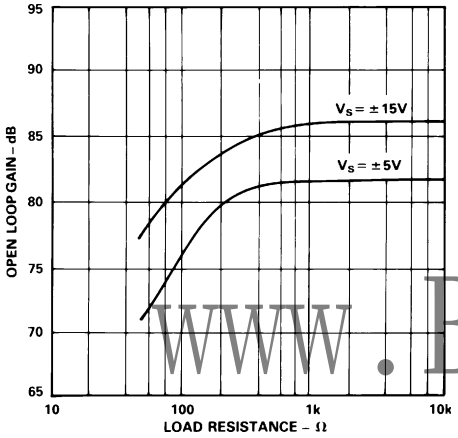

Figure 7. Open Loop Gain vs. Load Resistance (AD848)

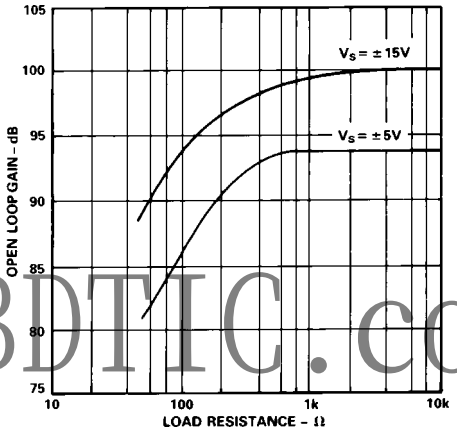

Figure 8. Open Loop Gain vs. Load Resistance (AD849)

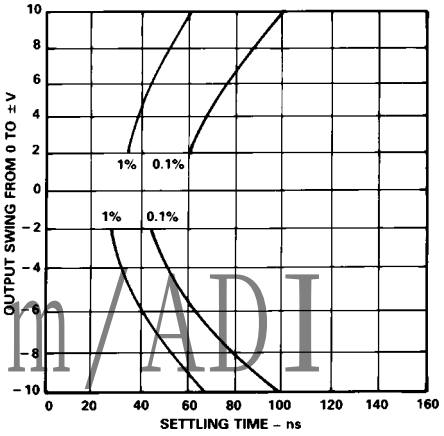

Figure 9. Output Swing and Error vs. Settling Time (AD848)

www.BDTIC.com/ADI

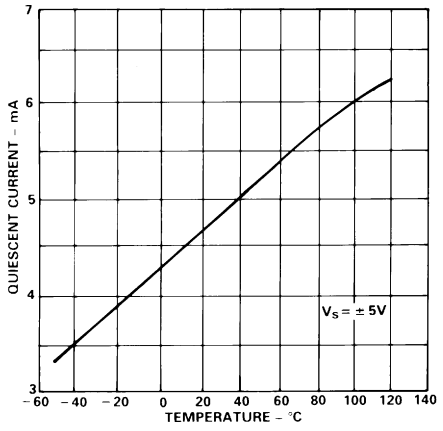

Figure 10. Quiescent Current vs. Temperature (AD848 and AD849)

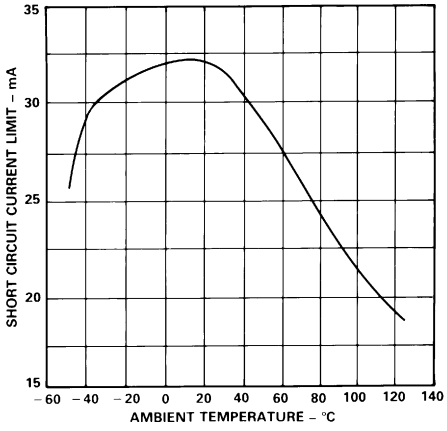

Figure 11. Short Circuit Current Limit vs. Temperature (AD848 and AD849)

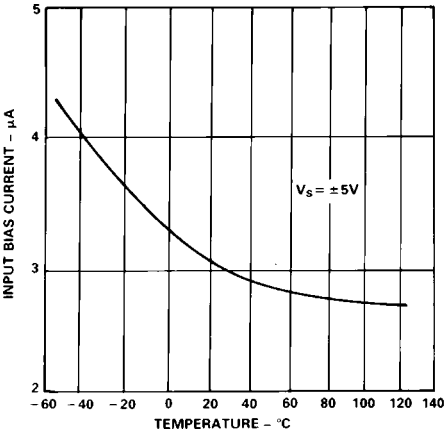

Figure 12. Input Bias Current vs. Temperature (AD848 and AD849)

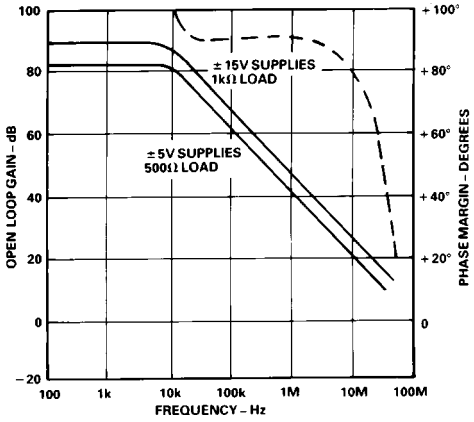

Figure 13. Open Loop Gain and Phase Margin vs. Frequency (AD848)

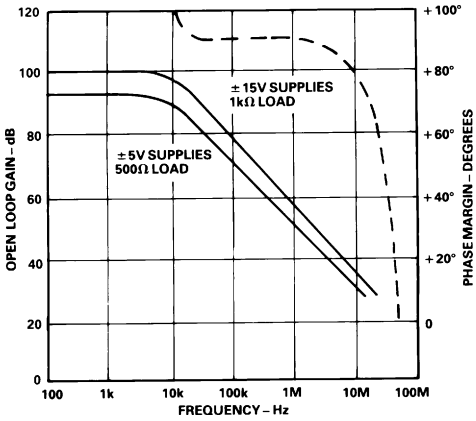

Figure 14. Open Loop Gain and Phase Margin vs. Frequency (AD849)

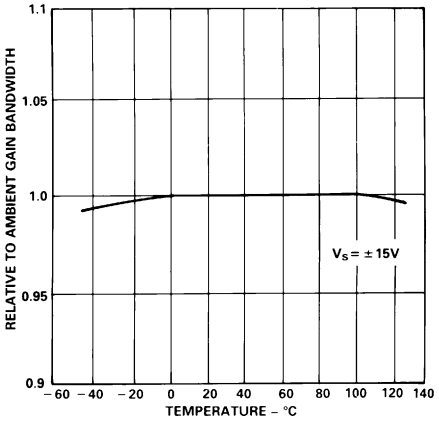

Figure 15. Normalized Gain Bandwidth Product vs. Temperature (AD848 and AD849)

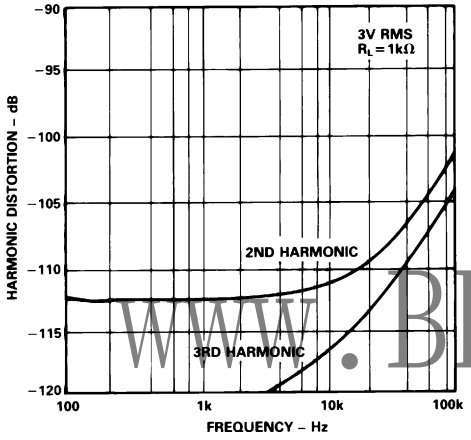

Figure 16. Harmonic Distortion vs. Frequency (AD848)

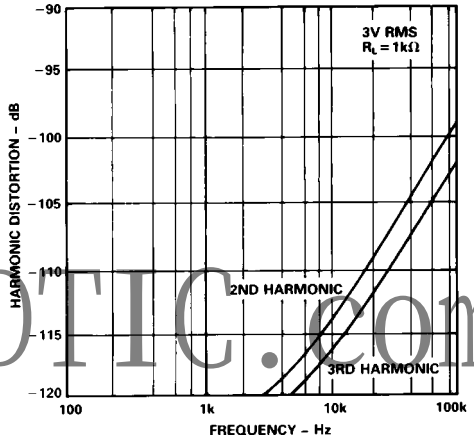

Figure 17. Harmonic Distortion vs. Frequency (AD849)

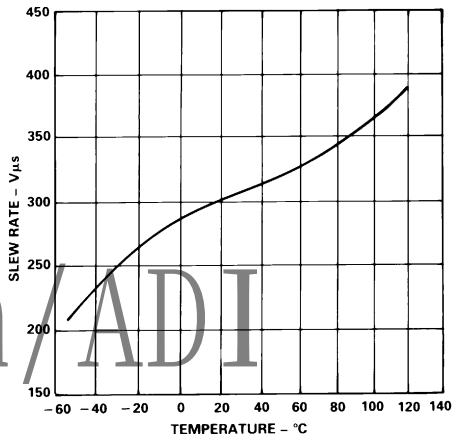

Figure 18. Slew Rate vs. Temperature (AD848 and AD849)

www.BDTIC.com/ADI

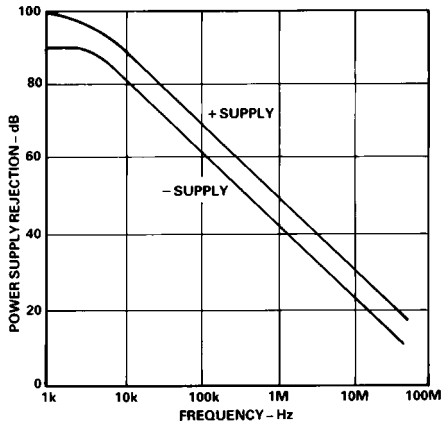

Figure 19. Power Supply Rejection vs. Frequency (AD848)

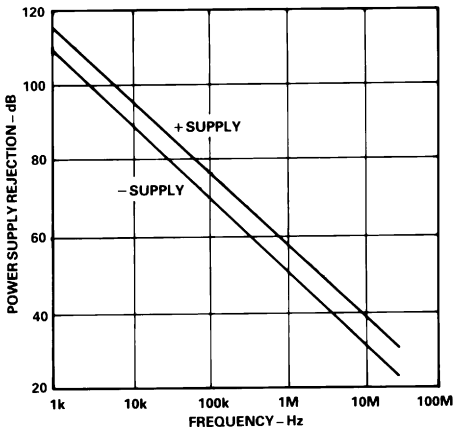

Figure 20. Power Supply Rejection vs. Frequency (AD849)

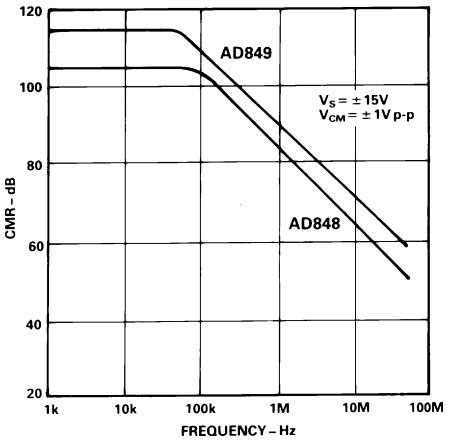

Figure 21. Common-Mode Rejection vs. Frequency

GROUNDING AND BYPASSING

In designing practical circuits with the AD848 or AD849, the user must remember that whenever high frequencies are involved, some special precautions are in order. Circuits must be built with short interconnect leads. A large ground plane should be used whenever possible to provide a low resistance, low inductance circuit path, as well as minimizing the effects of high frequency coupling. Sockets should be avoided because the increased interlead capacitance can degrade bandwidth.

Feedback resistors should be of low enough value to assure that the time constant formed with the capacitances at the amplifier summing junction will not limit the amplifier performance. Resistor values of less than 5 kΩ are recommended. If a larger resistor must be used, a small (< 10 pF) feedback capacitor in parallel with the feedback resistor, R_F, may be used to compensate for the input capacitances and optimize the dynamic performance of the amplifier.

Power supply leads should be bypassed to ground as close as possible to the amplifier pins. 0.1 µF ceramic disc capacitors are recommended.

VIDEO LINE DRIVER

The AD848 functions very well as a low cost, high speed line driver of either terminated or unterminated cables. Figure 22 shows the AD848 driving a doubly terminated cable.

The termination resistor, R_T, (when equal to the characteristic impedance of the cable) minimizes reflections from the far end of the cable. While operating off ±5 V supplies, the AD848 maintains a typical slew rate of 200 V/µs, which means it can drive a ±1 V, 24 MHz signal on the terminated cable.

A back-termination resistor (R_{BT}, also equal to the characteristic impedance of the cable) may be placed between the AD848 output and the cable in order to damp any reflected signals caused by a mismatch between R_T and the cable's characteristic impedance. This will result in a "cleaner" signal, although it requires that the op amp supply ±2 V to the output in order to achieve a ±1 V swing at the line.

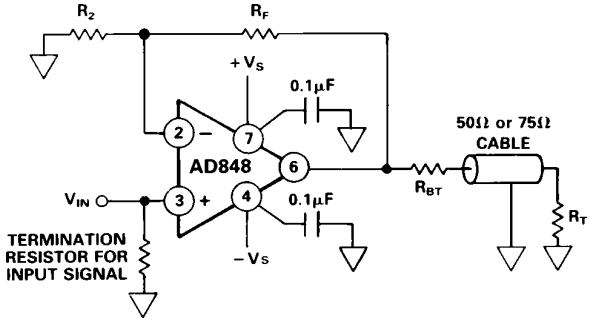

Figure 22. Video Line Driver

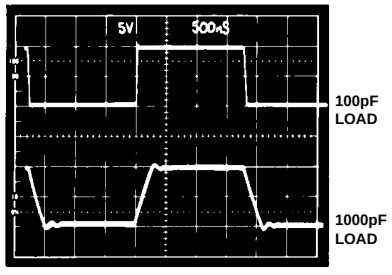

Figure 23. AD848 Driving a Capacitive Load

Often termination is not used, either because signal integrity requirements are low or because too many high frequency signals returned to ground contaminate the ground plane. Unterminated cables appear as capacitive loads. Since the AD848 and AD849 are stable into any capacitive load, the op amp will not oscillate if the cable is not terminated; however pulse integrity will be degraded. Figure 23 shows the AD848 driving both 100 pF and 1000 pF loads.

LOW NOISE PRE-AMP

The input voltage noise spectral densities of the AD848 and the AD849 are shown in Figure 24. The low wideband noise and high gain bandwidths of these devices makes them well suited as pre-amps for high frequency systems.

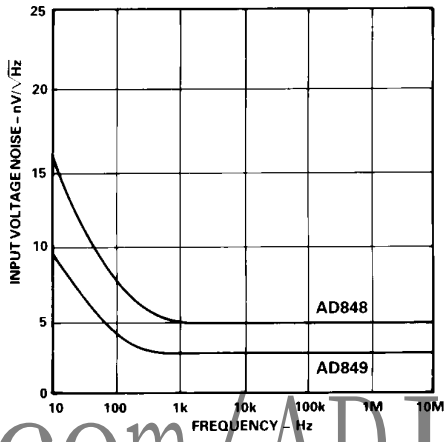

Figure 24. Input Voltage Noise Spectral Density

www.BDTIC.com/ADI

Input voltage noise will be the dominant source of noise at the output in most applications. Other noise sources can be minimized by keeping resistor values as small as possible.

OUTLINE DIMENSIONS

Dimensions shown in inches and (mm).

Mini-DIP (N) Package

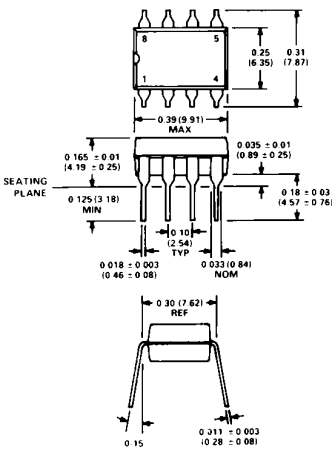

Cerdip (Q) Package

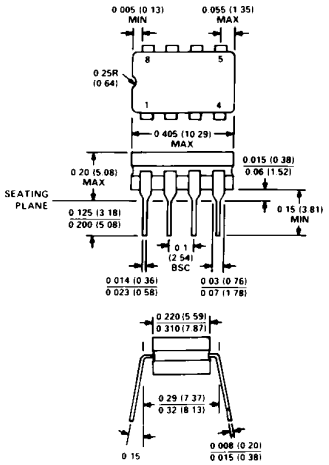

Small Outline (R) Package

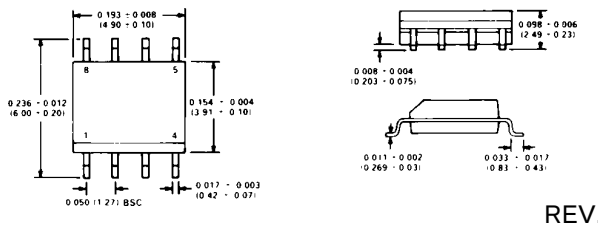

C1261b–5–9/90

PRINTED IN U.S.A.